

**SPECIFICATIONS** – *sin-cos hallpot® resolver*

Made by ----- *Elweco, Inc.*

**DESCRIPTION:**

Two signals are simultaneously present.

The NON-CONTACTING HALL EFFECT is used to generate the signals such that there is no wear in the sensor. Ball bearings are used on the rotor for long life. Anodized journal bearings are used for lower cost applications.



Model 100SB-GSC

Model 100TJ-GSC


**APPLICATIONS**

Measure and control

- antenna direction
- wind direction
- fluid flow direction
- camera angle
- hydrofoil and airfoil angle
- robotic joint angle
- dancer arm angle

These are typical applications. Your application may be different.

Elweco, Inc can modify design and parameters to fit into other applications.

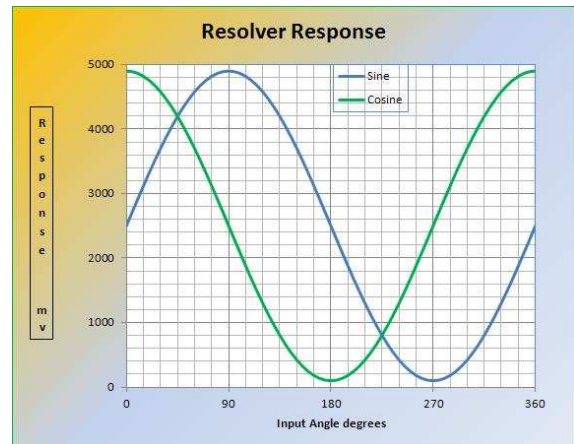

This shows the relationship of the two waveforms from the sin-cos hallpot® resolver to be decoded and converted into the angular signal in your system.

**SPECIFICATIONS**

Power supply --- +4.5 to +5.5 Vdc at 18 ma.

Input angle of rotation --- 0 to 360 degrees, continuous.

Output signal range --- With Power Supply voltage of 5000 mv

Sine -----  $2500 + 2400\sin\theta$

Cosine ---  $2500 - 2400\cos\theta$

Rotation rate --- 0 to 10,000 RPM

**ENVIRONMENT:**

Temperature ---- -20 to +105 Deg C

Relative Humidity ----- 0 to +95 %

**CONTACT**

Elweco, Inc  
 Ph/Fx 440-254-1716  
 e-mail [sales@elweco.com](mailto:sales@elweco.com)  
[www.elweco.com](http://www.elweco.com)  
[www.hallpot.com](http://www.hallpot.com)

**RETURN TO HOME PAGE**

This page contains information to help mounting and connecting the Two-Pi hallpot® Linear Angle Sensors. This includes:



- 1 --- Power supply and signal connections.
- 2 --- Internal electronics and explanation of signal outputs
- 3 --- Mechanical configurations --- made to fit.

Made by ----- Elweco, Inc.

Dimensions are shown in the following drawings to enable designing into your system.

### POWER SUPPLY and signal CONNECTIONS


It is important that the power supply be connected properly or damage to the device can result.

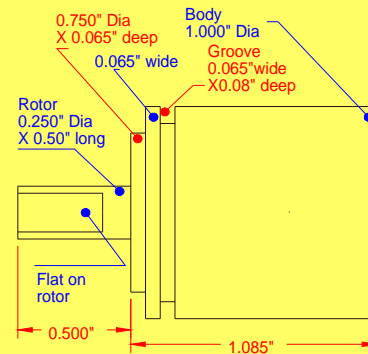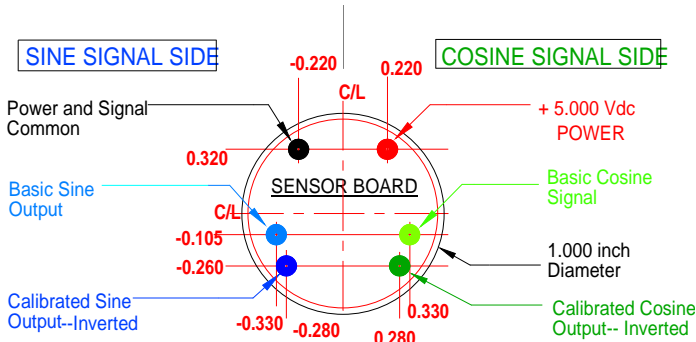

Model 100SB-G5

### INTERNAL Electronics and explanation of signal outputs of the sin-cos hallpot®resolver

Two hall-effect sensors are mounted orthogonally in the same magnetic field. Two signals, -sine and -cosine, are produced. They are standardized in gain and the phase error is measured. A second set of amplification corrects the phase error and produces the sine and cosine signals to within specifications.

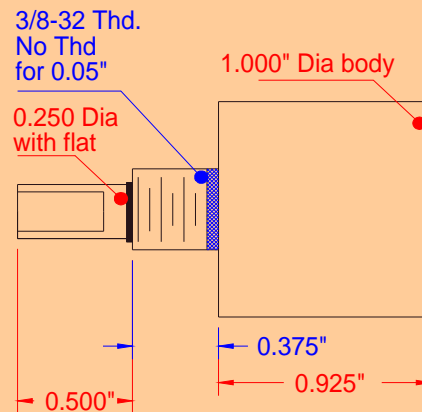

Model 100TJ-G5

### Mechanical configuration ----- made to fit

Standard common dimensions and shape are used for mounting so that no special hardware is needed to fit these devices into most systems, either new systems or existing designs. These consist of common servo-mounting with two common sizes and one device with a threaded journal to fit where ordinary potentiometers normally fit.

Ball bearings are used in the servo-mounting designs and anodized journal bearings are used in the threaded designs.

### CONTACT

Elweco, Inc

Ph/Fx 440-254-1716

e-mail [sales@elweco.com](mailto:sales@elweco.com)

[www.elweco.com](http://www.elweco.com)

[www.hallpot.com](http://www.hallpot.com)

[RETURN TO HOME PAGE](#)